

**66163****SINGLE CHANNEL OPTOCOUPLER**

09/22/03

**Features:**

- High Reliability
- Base lead eliminated for improved noise immunity
- Rugged package
- Stability over wide temperature
- +500V electrical isolation

**Applications:**

- Eliminate ground loops
- Level shifting
- Line receiver
- Switching power supplies
- Motor control

**DESCRIPTION**

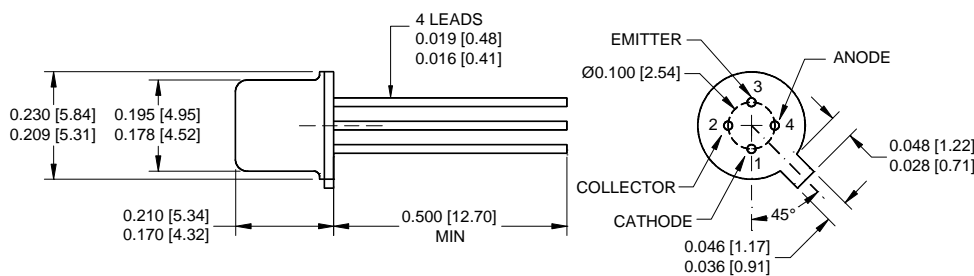
The **66163** contains a gallium arsenide infrared 880nm LED optically coupled to a silicon planar phototransistor. The optocoupler is built on a TO-46 header. The internal base connection has been eliminated for improved noise immunity.

**ABSOLUTE MAXIMUM RATINGS**

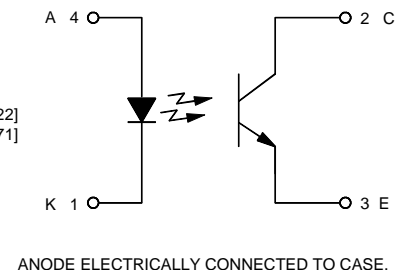
Input to Output Isolation Voltage (Note 3)	500V
Emitter-Collector Voltage	5V
Collector-Emitter Voltage	60V
Reverse Input Voltage	7V
Input Diode Continuous Forward Current (Note 1)	50mA
Peak Forward Input Current (Value applies for $t_w \leq 1\mu s$ , PRR < 300 pps)	500mA
Continuous Collector Current	50mA
Continuous Transistor Power Dissipation (Note 2)	230mW
Storage Temperature	-65°C to +150°C
Operating Free-Air Temperature Range	-55°C to +125°C
Lead Solder Temperature (10 seconds, 1/16" from case)	260°C

**Notes:**

1. Derate linearly to 125°C free-air temperature at the rate of 0.5 mA/°C above 25°C.
2. Derate linearly to 125°C free-air temperature at the rate of 2.3 mW/°C above 25°C.
3. Measured with input diode leads shorted together and output leads shorted together.

**Package Dimensions**

ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]

**Schematic Diagram**

# 66163

09/22/03

## SINGLE CHANNEL OPTOCOUPLER

### ELECTRICAL CHARACTERISTICS

T<sub>A</sub> = 25°C unless otherwise specified.

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Input Diode Static Reverse Current	I <sub>R</sub>			1	μA	V <sub>R</sub> = 3V
Input Diode Static Forward Voltage	V <sub>F</sub>		1.15	1.2	V	I <sub>F</sub> = 2mA
Input Diode Static Forward Voltage	V <sub>F</sub>		1.3	1.5	V	I <sub>F</sub> = 50mA
Reverse Breakdown Voltage	B <sub>VR</sub>	7	12		V	I <sub>R</sub> = 100μA
Input Diode Capacitance	C <sub>IN</sub>		25		pF	V = 0V, f = 1MHz

### OUTPUT TRANSISTOR

T<sub>A</sub> = 25°C unless otherwise specified.

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Collector-Emitter Breakdown Voltage	V <sub>(BR)CEO</sub>	50			V	I <sub>C</sub> = 1mA, I <sub>B</sub> = 0, I <sub>F</sub> = 0
Emitter-Collector Breakdown Voltage	V <sub>(BR)ECO</sub>	7			V	I <sub>C</sub> = 0mA, I <sub>E</sub> = 10μA, I <sub>F</sub> = 0
Collector-Emitter Dark Current	I <sub>CEO1</sub>			60	nA	V <sub>CE</sub> = 50V, I <sub>F</sub> = 0mA
	I <sub>CEO2</sub>			10	nA	V <sub>CE</sub> = 5V, I <sub>F</sub> = 0mA

### COUPLED CHARACTERISTICS

T<sub>A</sub> = 25°C unless otherwise specified.

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
On State Collector Current	I <sub>C(ON)</sub>	4			mA	V <sub>CE</sub> = 5V, I <sub>F</sub> = 10mA
On State Collector Current	I <sub>C(ON)</sub>	3		20	mA	V <sub>CE</sub> = 0.4V, I <sub>F</sub> = 10mA
On State Collector Current	I <sub>C(ON)</sub>	2			mA	V <sub>CE</sub> = 5V, I <sub>F</sub> = 10mA, -55°C
Collector-Emitter Saturation Voltage	V <sub>CE(SAT)</sub>			0.4	V	I <sub>F</sub> = 50mA, I <sub>C</sub> = 10mA
Isolation Resistance	R <sub>ISO</sub>	10 <sup>9</sup>			Ω	V <sub>IN-OUT</sub> = 500V
Input to Output Capacitance	C <sub>IO</sub>		2	2.5	pF	f = 1MHz
Delay Time	t <sub>d</sub>		2	4	μs	V <sub>CE</sub> = 5V, I <sub>F</sub> = 2mA, R <sub>L</sub> = 100Ω
Storage Time	t <sub>s</sub>		0.2	0.5	μs	V <sub>CE</sub> = 5V, I <sub>F</sub> = 2mA, R <sub>L</sub> = 100Ω
Rise Time	t <sub>r</sub>		3	5	μs	V <sub>CE</sub> = 5V, I <sub>F</sub> = 2mA, R <sub>L</sub> = 100Ω
Fall Time	t <sub>f</sub>		4	5	μs	V <sub>CE</sub> = 5V, I <sub>F</sub> = 2mA, R <sub>L</sub> = 100Ω

### RECOMMENDED OPERATING CONDITIONS:

PARAMETER	SYMBOL	MIN	MAX	UNITS
Input Current, Low Level	I <sub>FL</sub>	0	1	μA
Input Current, High Level	I <sub>FH</sub>	2	10	mA
Supply Voltage	V <sub>CE</sub>	5	50	V
Operating Temperature	T <sub>A</sub>	-55	125	°C

### SELECTION GUIDE

PART NUMBER	PART DESCRIPTION
66163-001	Commercial
66163-101	Screened